



TERMINAL FILTER

Exhaust into a hallway with an extra layer of HEPA filtration when venting air outside is not an option

TF2448

TF2448

Minimize the disruption of noisy exhaust outflow air into the hallway through the diffuser during construction and renovation projects in healthcare facilities with no outside venting option.

FEATURES & BENEFITS

- Lightweight, durable, and economical
- Low pressure drop, conserves airflow
- Constructed of an anodized aluminum frame and galvanized steel back plate
- Includes 4 corner hooks for installation in T-Bar ceiling grid systems
- HEPA Certified to IEST UL900
- 12" diameter duct collar

TECHNICAL SPECIFICATIONS

DESCRIPTION	UNIT	TF2448
Dimensions (L x W x H)	in (cm)	24 x 48 x 4.735 (60.96 x 121.92 x 12.03)
Unit of Measure	ea / cs	1
Ducting Compatibility	in	12" Diameter
Ratings	-	IEST recommended practice for testing HEPA filters. UL 900.
Optional Accessories	-	H2350-12 Locking Clamp

Specifications and details are subject to change without prior notice.




*PAS2400 not included, sold separately

DUCT PORT VIEW



FILTER VIEW

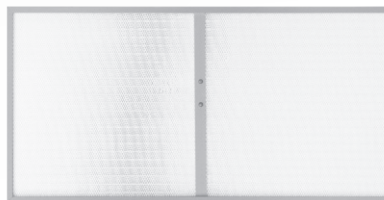

CONTACT US FOR MORE INFORMATION



USA
 1-800-634-9091
 ABATEMENT.COM
 IAQINFO@ABATEMENT.COM

CANADA
 1-800-827-6443
 ABATEMENT.CA
 IAQINFO@ABATEMENT.CA

THE TF2448 IS BEST SUITED FOR:

- HEALTHCARE CONSTRUCTION
- HEALTHCARE FACILITIES
- CRITICAL ENVIRONMENT PROTECTION