

Temporary, reusable modular wall system for dust control during construction and renovation in critical care environments





The AIRE GUARDIAN® SHIELD is a modular wall system designed to contain airborne contaminants while performing construction or renovation work. The wall system can also be used as a patient isolation area or clean room to prevent airborne contaminants from entering. When used properly in conjunction with an Abatement Technologies Portable Air Scrubber, the AIRE GUARDIAN® SHIELD maintains negative or positive pressure differentials. Additionally, the AIRE GUARDIAN® SHIELD can be used to build an anteroom to allow passage between rooms while maintaining negative pressure differentials

TABLE OF CONTENTS

Introduction	2
What is the AG SHIELD Ideal For?	3
The Real Advantage	4
Competitive Advantage	5
All About AG SHIELD Panels	6, 7
All About Exhaust Panels	8, 9
All About Door Panels	10
Special Order Clear Panels	11
Panel Accessories	12
Hardware and Connectors	13
AG SHIELD Parts List	14
Who We Are	15
Contact and Locations	16



Currently deployed in many major health networks
Canada wide

Exceeds ICRA Class 5 requirements
Premier temporary containment solution
Helps to reduce or eliminate future containment costs
System may pay for itself in as little as 3-5 uses

CA: 1.800.827.6443 • ABATEMENT.CA







QUICK, EASY AND VIRTUALLY DUST FREE

With a modular design and single tool assembly the SHIELD system will get you started with less labour, less time, and virtually no dust



ADAPTABLE DESIGN FOR EVERY JOB

With 4 panel sizes, fixed or flexible corners, doors that can swing in or out, and interchangeable exhaust collars, the SHIELD adapts to almost any work area



EXQUISITE DESIGN

Our extruded aluminum and frosted polycarbonate panels give any site a clean, professional, high-end image. The SHIELD is also customizable with your logo graphics



EASY DECONTAMINATION

With smooth surfaces that are resistant to aggressive hospital cleaning practices it is easy to decontaminate before, during, and after construction



ENVIRONMENTALLY SOUND, BUDGET FRIENDLY

Because the SHIELD system is reusable, you're not creating waste when it's time to move to the next job, compounding materials savings over time



SECURE ENVIRONMENT

With lockable doors and exhaust plates, as well as, virtually hidden panel connectors the SHIELD creates a protective barrier around your site



LEVEL SURFACE

Our unique levelling plates, shim system, and ceiling clamps help your containment stay sealed, even in uneven environments




ICRA COMPLIANCE

Easily create ICRA compliance up to Class 5





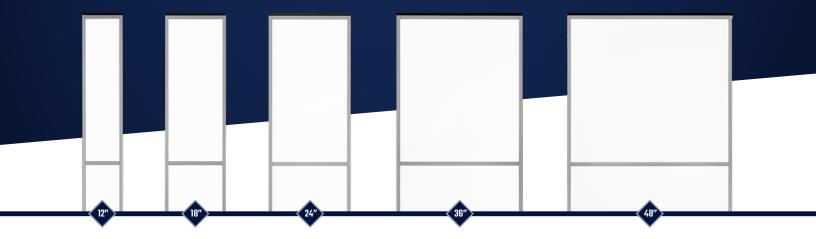

OTHER SPECS

Frame Construction: Anodized Aluminum with steel screws

Weight Range: 17 - 32lbs

Panel Construction: Translucent polycarbonate

Sound Attenuation: In 3rd party test results, the AIRE GUARDIAN® SHIELD reduced the noise

level of an air compressor operating at 90dB at a distance of 8ft from the

wall by 17dB

POLYCARBONATE SURFACE BURN CHARACTERISTICS

ASTM E84 (US Standard) NFPA Class A & IBC Class A Flame Spread 5 Smoke Development Rating: 170






PANEL LISTINGS *All necessary installation hardware is included

*STANDARD PANELS	WIDTH	MIN / MAX HEIGHT	DIMENSIONS	PART NUMBER
12" Panel	12"	84" / 123"	12"W x 84"T x 2"D	AGSHIELD-P12WK
18" Panel	18"	84" / 123"	18"W x 84"T x 2"D	AGSHIELD-P18WK
24" Panel	24"	84" / 123"	24"W x 84"T x 2"D	AGSHIELD-P24WK
36" Panel	36"	84" / 123"	36"W x 84"T x 2"D	AGSHIELD-P36WK
48" Panel	48"	84" / 123"	48"W x 84"T x 2"D	AGSHIELD-P48WK

6



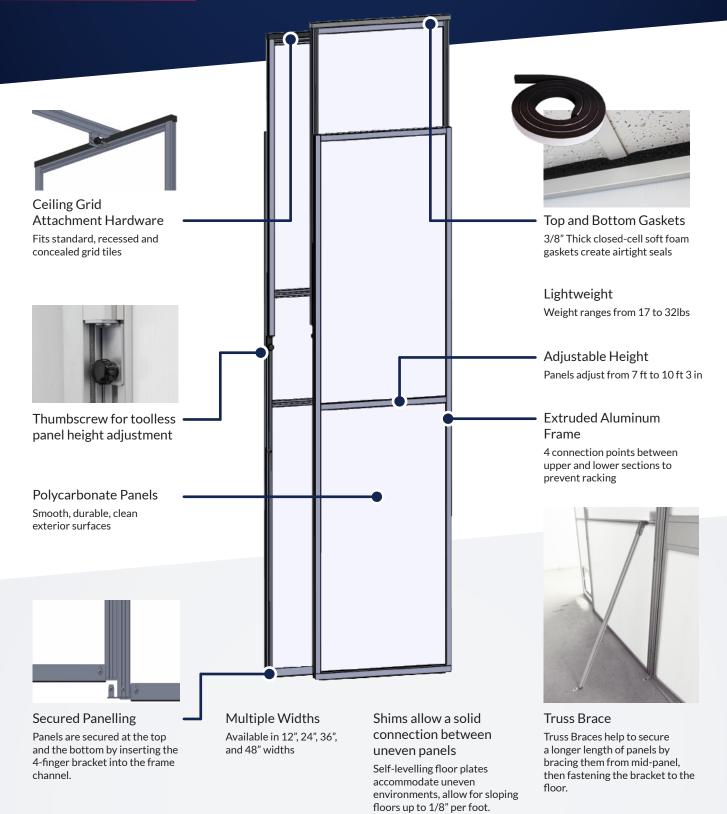



EXHAUST KIT with BLANK SECURITY PLATE | AGSHIELD-EXK

If ducting is needed on any other size of a panel, purchase an Exhaust Frame Kit. (AGSHIELD-EXK). This kit should be installed before assembling the AG SHIELD wall. If ducting is needed on both sides of a panel, purchase 2 of the Exhaust Frame Kits and mirror them on either side.

AGSHIELD-EX12 Exhaust port, 12" diameter collar



AGSHIELD-EX10 Exhaust port, 10" diameter collar



AGSHIELD-EX08 Exhaust port, 8" diameter collar



AGSHIELD-EXD Exhaust/Intake plate with diffuser & 2" pleated filter

AGSHIELD-EP24W

One exhaust port frame comes installed on a two-foot white panel



When the port is not in use it can be sealed with the removable locking security plate which is included

MEASURING NEGATIVE AIR

Differential pressure monitor mounts fasten the Portable PPM3-S or Fixed Wall Mount RPM-RT series monitors to the outside or inside of panels to allow greater flexibility in monitor placement.





RPM-RT Pressure Monitor Mount



AGSHIELD-HWPM2





AG SHIELD's prehung doors are available in two sizes, and are easily changed to swing in or out and hinge left or right. This door ships standard with a door closer, a lockable lever lockset and filler panels to adjust to different ceiling heights up to 10ft above the door. An optional door kit with a SCHLAGE® digital keypad with a lever style handle is also available.

DETAILS

Standard class 3 hardware with electronic keypad lock option Class 2 SFIC lockset included Easily change swing in/out Over the door kit is included Adjustable threshold and sweep Closer is always mounted on the construction side Weight: 55 - 63lbs



AGSHIELD-D44WK*

*Window Kit sold separately (AGSHIELD-WK)



PN: HARDWRE170 *Included



Optional purchase: PN: AGSHIELD-KEYPAD



New Key Locking Lever Style Handle included

UNIVERSAL DOOR LISTINGS

UNIVERSAL SWING	DETAILS	PART NUMBER
44" x 80" Hinged Door	Pre-hung Door includes Key Locking Lever Handle	AGSHIELD-D44WK
44" x 80" Hinged Door	In a 48" panel, Electronic Keypad and Door Closer	AGSHIELD-D44WPK
32" x 80" Hinged Door	Pre-hung Door includes Key Locking Lever Handle	AGSHIELD-D32WK
32" x 80" Hinged Door	In a 36" panel, Electronic Keypad and Door Closer	AGSHIELD-D32WPK

NEW AG SHIELD SLIDING DOOR

The self closing sliding door is an excellent option where space is limited. This option eliminates the need for a door to swing into a hallway or the containment space increasing safety. The door features a removable magnet to hold the door open and a gravity driven self closing mechanism.

This door slides to the left and requires a 3ft or 4ft panel installed to the left. It ships with a track cover, SCHLAGE® digital keypad handle and filler panels to adjust to different ceiling heights up to 10ft above the door.



SLIDING DOOR LISTING

SELF-CLOSING	DETAILS	PART NUMBER
42" x 80" Door	42″ Sliding Door In a 48″ White Panel	AGSHIELD-DS42WK



AG SHIELD CLEAR PANELS

AIRE GUARDIAN® SHIELD CUSTOM COMPONENTS

Design the AG Shield wall system with your choice of clear, translucent, or a combination of both panels depending upon your requirements.



Where visibility is a must, special order clear panels and doors

Minimum Order Quantities Apply.

Great product and accepted by many hospitals and institutions where infection control measures are the main focal point. Let's ensure all our staff and loved ones are protected during renovations.





Talk to your Sales Representative about your requirements for a Custom Built Solution

AG SHIELD PANEL ACCESSORIES

Windows

The window kit (AGSHIELD-WK) can be installed on a panel or door before or after the wall is built. It can be installed on any 2, 3 or 4-foot panel or door in the upper panel area. Simply cut out a rectangle that is $19^{\prime\prime}$ x $25^{\prime\prime}$ in the desired location. The kit includes the clear window pane, a frame, a template and all installation hardware.

Wall Seals

Wall seals can be used to create a small extension to fill gaps between an existing wall and the AIRE GUARDIAN® SHIELD wall. Drywall adapters can be used to attach a section of drywall to the panel system to accommodate non-plomb walls or other obstructions such as handrails.

Corners

The flexible hinged universal corner has a maximum swing to 150° sweep outward and 105° sweep inward. When used as an inside corner it changes the path inwards towards the containment area and decreases the containment area. When used as an outside corner it changes the path outwards away from the containment area and increases the containment area. The fixed inside corner changes the wall path 90° . T-Connections create an intersection in a wall allowing you to T-off that wall 90° with another panel either outward or inward. All Corners and T-Connections are height adjustable from 7 ft to 10 ft 3° .





AGSHIELD-WK

AGSHIELD-WSED









AGSHIELD-TO

Fixed Corners

AGSHIELD-TI

Universal Hinged Corners

ACCESSORY LISTINGS

PANEL CORNERS	MIN / MAX HEIGHT	WEIGHT (lbs)	PART NUMBER
Corner, Fixed 90° Inside	84" / 123"	14	AGSHIELD-CFI
Corner, Hinged Universal	84" / 123"	18	AGSHIELD-CHU
T-Connection Outward	84" / 123"	14	AGSHIELD-TI
T-Connection Inward	84" / 123"	14	AGSHIELD-TO
OTHER ACCESSORIES			PART NUMBER
Window Kit			AGSHIELD-WK
Wall Seal 3" Extended, Metal with Foam -	- L & R		AGSHIELD-WSE3
Wall Seal Kit, Extended - For Drywall			AGSHIELD-WSED



All necessary connectors are included with panels.

Additional connectors can be purchased using the part numbers listed below.

Panel Brackets (Upper and Lower)

Panel Brackets connect two panels together

Panel Clamps

Panel clamps close spaces between components which may arise due to sloped floors or corners. Panel clamps can be installed inside of the lower panels or outside of the upper panels.

Ceiling Brackets

Ceiling brackets attach the panels and doors to the suspended ceiling grid.

Shims

Use the appropriate number of shims to fill in gaps under the upper panel bracket

Transport Cart

The transport cart fits through standard doors and has four swivel wheels for easy handling. Panels are secured with ratchet straps. The large side of the cart can carry up to a total of 8 panels of any size but no more than 4 doors at a time. The small side can carry up to 3 one-foot or two-foot panels. Great for storage between projects. (The transport cart must be assembled)



ACCESSORY LISTINGS

HARDWARE AND CONNECTORS	PART NUMBER
Panel Brackets - Upper and Lower, 10/PK ea.	AGSHIELD-HWPB10
Panel Clamps, 10/PK	AGSHIELD-HWPC10
Ceiling Brackets, 10/PK	AGSHIELD-HWCG10
Shims, 30/PK	AGSHIELD-HWS30
Panel Brackets with Floor Mount	AGSHIELD-HWFB10
Drywall Ceiling Brackets	AGSHIELD-HWCD10
Transport Cart	AGSHIELD-CART2











AGSHIELD-HWCG10

AGSHIELD-HWPC10

AGSHIELD-HWFB10

AGSHIELD-HWCD10

AGSHIELD-HWS30





	STANDARD PANELS	WIDTH	MIN / MAX HEIGHT	DIMENSIONS	PART NUMBER	
	12" Panel	12"	84" / 123"	12"W x 84"T x 2"D	AGSHIELD-P12WK	
	18" Panel	18"	84" / 123"	18"W x 84"T x 2"D	AGSHIELD-P18WK	
	24" Panel	24"	84" / 123"	24"W x 84"T x 2"D	AGSHIELD-P24WK	
	36" Panel	36"	84" / 123"	36"W x 84"T x 2"D	AGSHIELD-P36WK	
	48" Panel	48"	84" / 123"	48"W x 84"T x 2"D	AGSHIELD-P48WK	
	24" Panel, White with Exhaust Port	24"	84" / 123"	24"W x 84"T x 2"D	AGSHIELD-EP24W	
	DOOR PANELS	TYPE		DETAILS	PART NUMBER	
	44" Hinged Door	Universal Swing	In a 48″ panel, key locking lever	handle set and door closer	AGSHIELD-D44WK	
	44" Hinged Door	Universal Swing	In a 48" panel, electro	onic keypad and door closer	AGSHIELD-D44WPK	
	32" Hinged Door	Universal Swing	In a 36" panel, key locking lever	handle set and door closer	AGSHIELD-D32WK	
	32" Hinged Door	Universal Swing	In a 36" panel, electro	onic keypad and door closer	AGSHIELD-D32WPK	
	42" Sliding Door	Sliding	Self Closing, 42" Slidir	ng Door in a 48″ White Panel	AGSHIELD-DS42WK	
	PANEL CORNERS	WEIGHT		DIMENSIONS	PART NUMBER	
	Corner, Fixed 90° Inside	14		123" / 84"	AGSHIELD-CFI	
	Corner, Hinged Universal	18		123" / 84"	AGSHIELD-CHU	
	T-Connection Outward	14		123" / 84"	AGSHIELD-TO	
	T-Connection Inward	14		123" / 84"	AGSHIELD-TI	
	EXHAUST SYSTEM INDIVIDUAL COMPONENTS		COLLAR SIZE	DIMENSIONS	PART NUMBER	
	Exhaust Kit, 2 Frames with Security Plate and Plastic Kr	nob	-	16.5"W x 16.5"T x 2"D	AGSHIELD-EXK	
	8" Exhaust Plate		8″	15"W x 15"T x 3"D	AGSHIELD-EX08	
	10" Exhaust Plate		10"	15"W x 15"T x 3"D	AGSHIELD-EX10	
	12" Exhaust Plate		12"	15"W x 15"T x 3"D	AGSHIELD-EX12	
	Exhaust / Intake Plate with Diffuser and 2" Pleated Filter	r	-	20"W x 20"T x 3"D	AGSHIELD-EXD	
	PRESSURE MONITOR HANGER			MONITOR	PART NUMBER	
	Portable Pressure Monitor			PPM3-S	AGSHIELD-HWPM1	
	Wall Mounted Pressure Monitor			RPM-RT1 / RPM-RT2	AGSHIELD-HWPM2	
HAI	RDWARE AND CONNECTORS	PART NUMBI	ER OTHER ACC	ESSORIES	PART NU	MBER
Dan	al Clarena 10/DI/	ACCUIELD HWDG	210 Window Kit		ACCHIE	I D WIZ

HARDWARE AND CONNECTORS	TAKT NOTIBER
Panel Clamps, 10/PK	AGSHIELD-HWPC10
Ceiling Brackets, 10/PK	AGSHIELD-HWCG10
Shims, 30/PK	AGSHIELD-HWS30
Panel Brackets with Floor Mount	AGSHIELD-HWFB10
Drywall Ceiling Brackets	AGSHIELD-HWCD10
Panel Brackets - Upper and Lower, 10/PK	AGSHIELD-HWPB10

OTHER ACCESSORIES	PART NUMBER
Window Kit	AGSHIELD-WK
Wall Seal 3" Extended, Metal with Foam - L & R	AGSHIELD-WSE3
Wall Seal Kit, Extended - For Drywall	AGSHIELD-WSED
Transport Cart	AGSHIELD-CART2
Closed Cell Gasket, 8ft length	TAPE46







WHO WE ARE

Infection control and reducing healthcare associated infections (HAI's) have become a central concern in hospital construction environments. Our passion is clean air and we have been designing and manufacturing equipment for healthcare facilities for over 30 years. Our vast portfolio of Abatement Branded products includes; negative air machines, air scrubbers, patient isolation systems, pressure differential monitors, and mobile containment carts to name just a few. The development of the AIRE GUARDIAN® Shield was a natural extension of our desire to help control dust and the potential release of airborne pathogens into the air in critical care environments, posing a risk to patients, staff and visitors.

We are dedicated to providing the best in customer service and technical support for all of our products. Let us help you with all of your construction containment needs.







*Products shown are not to scale. Visit the website for more details.

Part Numbers: 1) Consummable Supplies 2) BD2KM/A 3) HC800FD/UV 4) HC500CD 5) RAM3000DBL 6) AT250RS 7) RAM1000 8) RAM1000LP 9) PRED750 10) AG8000 11) PAS750 12) AGSHIELD-CART2

EABATEMENTTECHNOLOGIES

For more than 30 years companies around the world have relied on Abatement Technologies for HEPA filtration systems and other indoor air quality products with industry-leading quality, performance and reliability.



Our experienced and professional staff are dedicated to providing exceptional customer service and technical support.

Knowledgeable sales representatives can help you select the right equipment for your specific application.

MAIN OFFICES

Abatement Technologies CA

7 High Street Fort Erie, ON L2A 3P6 CAN. 800-827-6443 Intl. +01-905-871-4720 iaginfo@abatement.ca

Abatement Technologies US

605 Satellite Blvd. Suite 300 Suwanee, GA 30024 US 800-634-9091 Intl. +01-678-889-4200 iaqinfo@abatement.com

SATELLITE OFFICES

Vancouver

F102-19720-94A Avenue, Langley, BC V1M 3B7 778-372-2611

Hamilton

428 Millen Rd. Unit 10 Stoney Creek, ON L8E 3N9 905-664-6075

St. John's

5 Maverick Place Paradise, NL A1L 1Y8 709-800-9020

Ottawa

51 Capital Drive Ottawa, ON K2G 0E7 613-749-9667

Dartmouth

121 IIsley Ave Unit 12 Dartmouth, NS B3B 1J1 902-334-0900

Moncton

1070 St. George Blvd Unit 100 Moncton NB E1E 4K7 506-406-5999

Edmonton

16403 - 117 Ave. NW Edmonton, AB T5M 3V3 780-665-5165

Toronto

144 Sharer Rd. Vaughan, ON L4L 8P4 905-266-1322

Montreal

1950 Bernard Lefebvre Laval, QC H7C 0A5 514-375-0606

Calgary

F-7004 5th St. SE Calgary, AB T2H 2G3 403-351-2223



ABATEMENT TECHNOLOGIES LEADERS IN CLEAN AIR

16

AG SHIELD COMPONENTS
CATALOGUE