

A yellow Werner step ladder is positioned in the center of a modern office hallway. The hallway features glass partitions and a curved ceiling. The ladder has the 'WERNER' logo on its top rail. The background is a clean, minimalist office environment with a curved wall and ceiling.

# **HEALTHCARE CONSTRUCTION & FACILITY MAINTENANCE**

Indoor air quality products with industry-leading quality, performance and reliability.





For more than 38 years companies across the globe have relied on Abatement Technologies® for portable HEPA filtration systems, dust containment solutions and other indoor air quality products with industry-leading quality, performance and reliability.

## ABOUT US

Infection control and reducing healthcare associated infections (HAI's) have become a central concern in hospital construction environments. Abatement Technologies® specializes in assisting with dust control (ICRA) requirements for healthcare construction and renovation. Our highly trained and experienced staff can assist you in making the best product selections customized for the needs of your project.

## TABLE OF CONTENTS

PREDATOR® and HEPA-AIRE® Portable Air Scrubbers	3-5
PREDATOR® and HEPA-AIRE® Replacement Filters and Accessories Chart	5
BULLDOG® and HEPA-AIRE® Negative Air Machines	6
SHIELD WALL™ Containment Barriers	7-12
Containment Products	13-15
Environmental Monitors	16
Portable HEPA Vacuums	17
Commercial Drying Equipment	17
ICRA Packages for Mobile Containment	18
Consumables and Personal Protective Equipment (PPE)	19

US: 800-634-9091

CANADA: 800-827-6443

WWW.ABATEMENT.CA



# PREDATOR® & HEPA-AIRE®

## Portable Air Scrubbers

Abatement Technologies® developed the original portable air scrubber more than 20 years ago and our products continue to set the standard for quality, performance, portability, reliability and ease of use.

PREDATOR® models feature ultra-tough and easy to clean rotational-molded polymer housings made from a flame-retardant resin.

All models feature:

- UL-compliant pre-filters with high particulate holding capacity for longer filter life
- True non-electrostatic HEPA filters tested and certified to provide 99.97% or higher efficiency overall against 0.3-micron particles
- Optional VAPOR-LOCK® high capacity carbon filters for gas/odour adsorption (sold separately)
- High-performance motors and high-efficiency backward curved blowers for better airflow as filters load with particulate
- Recessed control panels for component protection
- Nationally Recognized Testing Laboratory (NRTL) certification to applicable UL and CSA safety standards



PART NO: PRED750

### PREDATOR® 750 PORTABLE AIR SCRUBBER

- Airflow: Variable speed airflow, rated 200 CFM - 750 CFM
- 6 air changes per hour (ACH) for max. 7,500ft³ spaces
- Weight: 35lbs with filters
- Peak power draw: 1.9 amps or less, daisy-chain up to 5 units per 15A circuit up to 3750 CFM
- Controls: Variable speed switch; green "unit on" and amber "change filter" indicator lamps; 25' power cord; GFCI-protected receptacles (2)
- 3 standard filtration stages: 1" MERV 4 natural fiber filter, 2" MERV 8 pleated filter and HEPA filter
- Optional pre-filter: 2" 500gsm or 150gsm VAPOR-LOCK® carbon filter (replaces standard stage 2 pre-filter)
- Ideal for use with AIRE GUARDIAN® 3000 Mobile Containment Cube (AG3000MCCCK)
- Stackable up to 3 units



PART NO: PRED1200 / PRED1200UV

### PREDATOR® 1200 PORTABLE AIR SCRUBBER

- Airflow: Variable speed, rated 300 CFM - 900 CFM
- 6 air changes per hour (ACH) for max. 9,000ft³ spaces
- Weight: 70lbs with filters
- Upright model with non-marking 8" rear wheels and front swivel casters
- Peak power draw: 3.5 amps or less, daisy-chain up to 3 units per 15A circuit up to 2700 CFM
- Controls: Variable speed switch; "unit on", "change pre-filter" and "change HEPA" indicator lamps; hour meter; GFCI-protected receptacles (2)
- 3 standard filtration stages: 1" MERV 4 natural fiber filter, 2" MERV 8 pleated filter and HEPA filter
- Optional pre-filter: 2" 500gsm or 150gsm VAPOR-LOCK® carbon filter (adds 4th filtration stage)
- Also available with built-in UV (PRED1200UV)
- The [PRED1200UV](#) combines the power of 254nm UV-C technology with the air-cleaning performance of HEPA filtration (PRED1200UV)



# PREDATOR® & HEPA-AIRE®

## Portable Air Scrubbers

HEPA-AIRE® models feature tough, corrosion resistant metal cabinets fabricated using airtight and watertight “zero bypass” rivet construction.



PART NO: PAS750

### HEPA-AIRE® 750 PORTABLE AIR SCRUBBER

- Airflow: Variable speed, rated 200 CFM – 750 CFM
- 6 air changes per hour (ACH) for max. 7,500 cubic foot spaces
- Weight: 33.5 pounds with filters
- Cabinet: Anodized aluminum
- Peak power draw: 1.9 amps or less, daisy-chain up to 5 units per 15A circuit
- Controls: Variable speed control switch; power “on” lamp; hour meter; “change filter” lamp; and GFCI-protected receptacles
- 3 standard filtration stages: 1” MERV 4 natural fiber filter, 2” MERV 8 pleated filter and HEPA filter
- Optional pre-filter: 2” 500gsm or 150gsm VAPOR-LOCK® carbon filter (replaces standard stage 2 pre-filter)
- Ideal for use with the AIRE GUARDIAN® AG8000 Mobile Containment Cart
- Stackable up to 3 units



PART NO: PAS1200 / PAS1200UV

### HEPA-AIRE® 1200 PORTABLE AIR SCRUBBER

- Airflow: Variable speed, rated 300 CFM – 900 CFM
- 6 air changes per hour (ACH) for max. 9,000 cubic foot spaces
- Weight: 85 pounds with filters
- Upright model, with non-marking 8” rear wheels and front swivel casters
- Cabinet: Stainless steel
- Peak power draw: 3.5 amps or less, daisy-chain up to 3 units per 15A circuit up to 2700 CFM
- Controls: unit on, change pre-filter, and change HEPA LIGHTS; variable speed control switch; hour meter; and GFCI-protected receptacles (2)
- 3 standard filtration stages: 1” MERV 4 natural fiber filter, 2” MERV 8 pleated filter and HEPA filter
- Optional pre-filter: 2” 500gsm or 150gsm VAPOR-LOCK® carbon filter (adds 4th filtration stage)
- The [PAS1200UV](#) combines the power of 254nm UV-C technology with the air-cleaning performance of HEPA filtration



PART NO: PAS1700

### HEPA-AIRE® PAS1700 PORTABLE AIR SCRUBBER

- Maximum rated airflow as high as 1650 CFM
- Weight: 88 pounds with filters
- Anodized aluminum cabinet is lightweight and resistant to corrosion and scratching
- Hour meter measures length of time during operation
- Filter change indicator light included
- Easy-opening prefilter door swings down, HEPA Filter door swings up, both close with a secure cam latch and a gasket to protect against filter by-pass
- The PAS1700 has been independently tested and certified in accordance with applicable UL and CSA safety requirements





PART NO: PAS2400

## HEPA-AIRE® 2400 ULTRA-HIGH PERFORMANCE PORTABLE AIR SCRUBBER

- Our most popular and versatile portable air scrubber
- Airflow: Two speed, rated 700 CFM (low)/ 2,100 CFM (high), the highest performance 120V/15A air scrubber available
- 6 Air changes per hour (ACH) for max. 21,000 cubic foot spaces
- Weight: 170 pounds with filters
- Cabinet: Stainless steel, with detachable top module
- Peak power draw: 12 amps or less
- 3 standard filtration stages: 1" MERV 4 natural fiber filter, 2" MERV 8 pleated filter and HEPA filter
- Optional pre-filter: 2" 750gsm VAPOR-LOCK® carbon filter (adds 4th filtration stage)



PART NO: PAS5000

## HEPA-AIRE® 5000 HIGH PERFORMANCE PORTABLE AIR SCRUBBER

- Airflow: One speed, rated 4,000 CFM, the highest performance air scrubber available
- 6 air changes per hour (ACH) for max. 40,000 cubic foot spaces
- Weight: 332 pounds with filters
- Cabinet: Galvanized 20 gauge steel
- Peak power draw: 23 amps or less on a 230V/30A/60Hz electric supply
- 2 standard filtration stages (2 of each filter required): 2" MERV 8 pleated pre-filters and HEPA filters
- Optional pre-filters (2 required): 2", 1000gsm VAPOR-LOCK® carbon filters (replace standard pre-filters)

## Replacement Filters and Accessories Chart

FILTER OR ACCESSORY	PRED750	PRED1200/UV	PAS750	PAS1200/UV	PAS1700	PAS2400	PAS5000
Stage 1: Large Particle Filter	F621	F621	F621	F621	F621	F1821	H2001(2)
Stage 2: MERV 8 Pleated Particle Filter	H502	H502/ H502UVR	H502	H502	H502	H1902	H2002 (2)
500+ Gm VAPOR-LOCK® Carbon	VL1002	VL1002	VL1002	VL1002	VL1002	VL2002	VL2024 (2)
Final Stage: 99.97% HEPA Filter	H161606-99	H610C-99	H161606-99	H610C-99	H1210C-99	H2418-99	H242406-99 (2)
UV Lamp	N/A	UV-415	N/A	UV-415	N/A	N/A	N/A
Lay Flat Outlet Ducting, 500' Roll	H2015-10	H2015-10	H2015-10	H2015-10	H2015-12	H2015-12	N/A
Black Wire-Reinforced Mylar, 25'	H2020-10	H2020-10	H2020-10	H2020-10	H2020-12	H2020-12	N/A
Hvy Duty Wire-Reinforced PVC	H2030-10	H2030-10	H2030-10	H2030-10	H2030-12	H2030-12	**H2030-12 (2) / H2030-14 (1)
Flex Duct Attachment Clamp (Intake)	H2350-10	H2350-10	H2350-10	H2350-10	H2350-12	H2350-12	H2350-12 (2)
Flex Duct Attachment Clamp (Exhaust)	H2350-10	H2350-10	H2350-10	H2350-10	H2350-12	H2350-12	H2350-14 (1)

\* Blue items come with the base unit. All others must be purchased separately

\*\* PAS5000 Hvy Duty Wire-Reinforced PVC: Intake:H2030-12 (2 ea) and Exhaust H2030-14 (1 ea)



# NEGATIVE AIR MACHINES



PART NO: BD2KM & BD2KMA

## BULLDOG® DURABLE POLYMER BODY NEGATIVE AIR MACHINES

- Airflow: Two Speed, rated 1,300 CFM (low) / 2,000 CFM (high)
- 6 Air changes per hour (ACH) for max. 20,000 cubic foot spaces
- Weight: 117 pounds with filters
- Cabinet: Durable polymer plastic
- Peak power draw: 10 amps
- Filtration: 3 stage with "Filter Change" indicator light
- HEPA: Individually tested to at least 99.97% @ 0.3 microns
- Casters: 2 Swivel Locking, 2 Fixed
- [BD2KMA](#) Features: 5" Pressure Gauge & Audio "Change Filter" Alarm



PART NO: H2KM & H2KMA

## HEPA-AIRE® GALVANIZED STEEL NEGATIVE AIR MACHINES

- Airflow: Two Speed, rated 1,300 CFM (low) / 2,000 CFM (high)
- 6 Air changes per hour (ACH) for max. 20,000 cubic foot spaces
- Weight: 124 pounds with filters
- Cabinet: 20 gauge galvanized steel
- Peak power draw: 10 amps
- Filtration: 3 stage with "Filter Change" indicator light
- HEPA: Individually tested to at least 99.97% @ 0.3 microns
- Casters: 2 swivel locking, 2 fixed
- [H2KMA](#) Features: 5" pressure gauge & audio "Change Filter" alarm



PART NO: H1990M

## HEPA-AIRE® GALVANIZED STEEL NEGATIVE AIR MACHINES

- Airflow: Two Speed, rated 1,050 CFM (low) / 1,600 CFM (high)
- 6 Air changes per hour (ACH) for max. 16,000 cubic foot spaces
- Weight: 125 pounds with filters
- Cabinet: Galvanized 20 gauge steel
- Peak power draw: 9 amps
- Filtration: 3 stage with "Filter Change" indicator light
- HEPA: Individually tested to at least 99.97% @ 0.3 microns
- Casters: 2 swivel locking, 2 fixed
- [H1990LV](#) variable speed model available

## Replacement Filters and Accessories Chart

Filter or Accessory	BD2KM / BD2KMA	H2KM / H2KMA	H1990M
Stage 1: Large Particle Filter	H2001	H2001	H1901
Stage 2: Merv 8 Pleated Particle Filter	H2002	H2002	H1902
Final Stage: 99.97% HEPA Filter	H242406-99	H242406-99	H1910M
Optional 3rd Stage Vapor-Lock® Pleated Carbon Filter	VL2024	VL2024	VL2002
Optional Inlet Manifold	H2080P	H2080P	H1980P
Flex Duct Attachment Clamp	H2350-12	H2350-12	H2350-12



# QUICK-TO-DEPLOY CONTAINMENT SOLUTIONS

The SHIELD WALL™ is a modular wall system designed to contain airborne contaminants while performing construction or renovation work.

The wall system can also be used as a patient isolation area or clean room to prevent airborne contaminants from entering.

When used properly in conjunction with an Abatement Technologies Differential Pressure Monitor and a Portable Air Scrubber, the SHIELD WALL™ maintains negative or positive pressure differentials.

Additionally, the SHIELD WALL™ can be used to build an anteroom to allow passage between rooms while maintaining negative pressure differentials.



## WHAT IS SHIELD WALL™ IDEAL FOR?

Compared to the time required to cut and install drywall, the SHIELD WALL™ is erected quickly and can adapt to multiple configurations and is available in three different materials to meet specific requirements.

**CORE, CLASSIC & CLEAR** SHIELD WALL™ are innovations in containment and are becoming the standard, as contractors are able to reduce labour and startup times through easy to connect panels, closed cell foam gaskets, and self-levelling floor sills.

Ideal for creating a temporary barrier around a construction or renovation area, all SHIELD WALL™ materials can be re-used eliminating waste and future containment costs.



**FAST SET UP**



**ADAPTABLE**



**ATTRACTIVE CONTAINMENT**



**EASY DECON**



**REUSABLE**



**SECURE**

**EXCEEDS**



**UP TO ICRA CLASS V**



## ALL ABOUT PANELS

- ✓ All SHIELD WALL™ components (CORE, CLASSIC & CLEAR) are interchangeable and compatible without the need for any special adaptors.
- ✓ The innovative drop-in connector hardware *combined* with our unique leveling plates allows for up to one inch of play that helps your containment to stay sealed in uneven environments.
- ✓ The SHIELD WALL™ system will get you started with **less labour, less time, and virtually no dust.**
- ✓ All SHIELD WALL™ components are **reusable** and don't create waste, compounding material **savings over time.**
- ✓ With smooth surfaces that are resistant to in-depth hospital cleaning practices it is **easy to decontaminate** before, during, and after construction.
- ✓ SHIELD WALL™ panels and doors give any site a **clean professional, high-end image** and are secure with locking doors and exhaust ports.

SHIELD WALL panels come in 5 widths (12", 18", 24", 36" & 48") and are height adjustable from 7' to 10' 3".

**3' extension panels are also available for purchase increasing the maximum height up to 13' 3".**

A built-in, 24" wide exhaust port panel is available in all 3 material options, featuring a lockable security plate. Exhaust port adaptor plates with 3 sizes of ducting collars (8", 10" and 12" dia.) may be purchased individually.



**SUPERIOR  
SOUND  
ATTENUATION**



**SOLUTIONS FOR  
CONSTRUCTION  
OR  
PATIENT  
ISOLATION**



**REUSABLE**

**CORE  
MATERIAL**

**CORE**

**CLASSIC  
MATERIAL**

**CLASSIC**

**CLEAR  
MATERIAL**

**CLEAR**

TRANSLUCENT  
POLYCARBONATE  
PANES  
ANODIZED ALUMINUM  
FRAME  
LIGHTWEIGHT YET  
DURABLE



# ALL ABOUT DOORS

SHIELD WALL™ CORE, CLASSIC & CLEAR doors are available in multiple widths and three styles are offered: hinged, sliding, or double-hinged. All doors include an adjustable threshold and sweep. Also included are filler panels for over-the-door, allowing for flexible height adjustment to different ceiling heights up to 10' 3".

## SLIDING DOORS

An excellent option where space is limited.

Slides open to the left (from the outside) and requires a minimum 3' (42" door) or 4' panel (54" door) installed to the left.

Available in two widths: 42" wide set in a 48" panel or 54" wide set in a 60" panel, both are height adjustable up to 10' 3" with the included over-the-door kit.

Features a gravity driven self closing mechanism and a magnet stop that may be removed.



## UNIVERSAL DOORS

Swing in or out, and can be hung left or right.

The 32" wide door is pre-hung in a 36" panel and the 44" wide door is set in a 48" panel.

Both doors are adjustable up to 10' 3" with the included over-the-door kit and door closer.

An electronic digital keypad may be purchased separately for hinged doors.



## DOUBLE-HINGED DOORS

Double hinged doors are 68" wide and set in a 72" frame.

The double door assembly is 84" high but adjustable up to 10' 3" with the included over-the-door kit.

The primary door with door handle cut out is 44" wide and the secondary door is 24" wide.

The primary door latches into the secondary door via the latch bolt.

The secondary door is secured at the top and bottom with spring loaded pins.

Both doors can be hung to swing in or out.




## SHIELD WALL™ CORNERS

The flexible hinged universal corner will change the wall path 90° (inward) and 270° (outward). When used as an inside corner it changes the path inwards towards the containment area and decreases the containment area. When used as an outside corner it changes the path outwards away from the containment area and increases the containment area. Hinged corners will add an additional 1" of length to one wall and 3" of length to the other.

The fixed inside corner changes the wall path 90°.

T-Connections create an intersection in a wall allowing you to T-off that wall 90° with another panel either outward or inward.

All Corners and T-Connections are height adjustable from 7' to 10' 3". 3' corner extensions are available for all of the four types above.

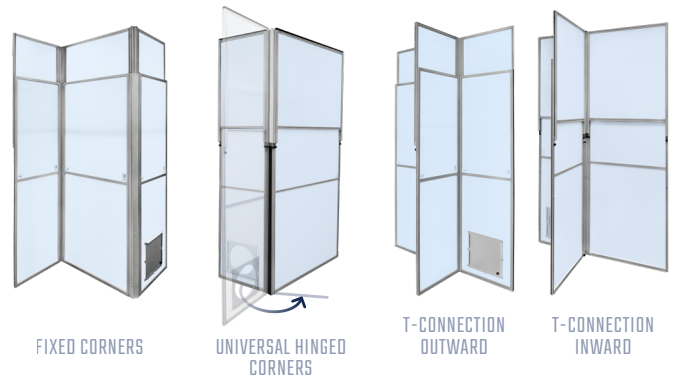

## WALL SEALS & ADAPTORS

### CORE, CLASSIC & CLEAR

Wall seals can be used to create a small extension to fill gaps between an existing wall and the SHIELD WALL™.

The drywall adaptor can be used to attach a section of drywall to the panel system to accommodate non-plumb walls or other protrusions such as handrails, pipes and large molding.

Fixed wall seals abut against walls with obstructions 0.5" or less such as thin molding.

The wall seal extension kit has both a left and right side extension that can extend up to 3.25', 9" in total width.

We also manufacture an adaptor kit that includes a left and right adaptor to connect to other system panels.



## HARDWARE, ACCESSORIES & CONNECTORS

Our new drop-in connection system has reduced the amount of hardware needed and has made installation quick and easy.

The transport cart fits through standard doors and has four swivel wheels for easy handling. Panels are secured to the cart with ratchet straps. The maximum load is 670 lbs of any combination of panels and doors. Great for storage between projects. (The transport cart must be assembled).

A window kit can be installed on a CLASSIC panel or door before or after the wall is built. It can be installed on any 2', 3' or 4' panel or door in the upper panel area.

Two kits are available:

- 16.5" x 22.5" window in a 20.5" x 26.5" frame
- 22" x 28" window set in a 26" x 32.5" frame.

Pre-installed exhaust port frames are available for any 2' CLASSIC, CLEAR or CORE panel that includes a blank security plate. Drop in exhaust plates are available with 8", 10" and 12" collars (purchased separately).

An exhaust frame kit can be purchased separately along with the drop in exhaust plate with the desired size of port collar. This kit is easy to install (for CLASSIC and CLEAR materials only).





# SHIELD WALL™ PARTS LIST

STANDARD PANELS	WIDTH	MIN / MAX HEIGHT	DIMENSIONS	CLASSIC PART NUMBER	CLEAR PART NUMBER	CORE PART NUMBER
12" Panel	12"	84" / 123"	12"W x 84"T x 2"D	SW-P12W	SW-P12C	SW-CORE-P12
18" Panel	18"	84" / 123"	18"W x 84"T x 2"D	SW-P18W	SW-P18C	SW-CORE-P18
24" Panel	24"	84" / 123"	24"W x 84"T x 2"D	SW-P24W	SW-P24C	SW-CORE-P24
36" Panel	36"	84" / 123"	36"W x 84"T x 2"D	SW-P36W	SW-P36C	SW-CORE-P36
48" Panel	48"	84" / 123"	48"W x 84"T x 2"D	SW-P48W	SW-P48C	SW-CORE-P48
24" Panel, White with Exhaust Port	24"	84" / 123"	24"W x 84"T x 2"D	SW-EP24W	SW-EP24C	SW-CORE-EP24

3' PANEL EXTENSIONS	WIDTH	MIN / MAX HEIGHT	DIMENSIONS	CLASSIC PART NUMBER	CLEAR PART NUMBER	CORE PART NUMBER
12" Panel	12"	36"	12"W x 36"H x 2"D	SW-P12W-X3	SW-P12C-X3	SW-CORE-P12-X3
18" Panel	18"	36"	18"W x 36"H x 2"D	SW-P18W-X3	SW-P18C-X3	SW-CORE-P18-X3
24" Panel	24"	36"	24"W x 36"H x 2"D	SW-P24W-X3	SW-P24C-X3	SW-CORE-P24-X3
36" Panel	36"	36"	36"W x 36"H x 2"D	SW-P36W-X3	SW-P36C-X3	SW-CORE-P36-X3
48" Panel	48"	36"	48"W x 36"H x 2"D	SW-P48W-X3	SW-P48C-X3	SW-CORE-P48-X3

DOORS	TYPE	DETAILS	CLASSIC PART NUMBER	CLEAR PART NUMBER	CORE PART NUMBER
32" Wide	Hinged	In a 36" panel, over-the-door filler panels and door closer (36"W frame X 80"H x 32W door)	SW-D32W	SW-D32C	SW-CORE-D32
44" Wide	Hinged	In a 48" panel, over-the-door filler panels and door closer (48"W frame X 80"H x 44"W door)	SW-D44W	SW-D44C	SW-CORE-D44
42" Wide	Sliding	Self closing, 42" sliding door in a 48" panel (48"W frame X 80"H x 42"W door)	SW-DS42W	SW-DS42C	SW-CORE-DS42
54" Wide	Sliding	Self closing, 54" sliding door in a 60" panel (60"W frame X 80"H x 54"W door)	SW-DS54W	SW-DS54C	SW-CORE-DS54
68" Wide	Double	44" Primary, 24" Secondary door in a 72" frame (72"W frame x 80"H x 68"W door)	SW-DD68W	SW-DD68C	SW-CORE-DD68

PANEL CORNERS	MIN / MAX HEIGHT	PART NUMBER
Corner, Fixed 90° Inside	84"/123"	SW-CFI
Corner, Hinged Universal	84"/123"	SW-CHU
T-Connection Outward	84"/123"	SW-TO
T-Connection Inward	84"/123"	SW-TI

3' CORNER EXTENSIONS	WIDTH	MIN / MAX HEIGHT	DIMENSIONS	PART NUMBER
Fixed Corner Extension	3"	36"	3"W x 36"H x 2"D	SW-CFI-X3
Hinged Universal Corner Extension	3"	36"	3"W x 36"H x 2"D	SW-CHU-X3
T-Connection Outward Extension	3.5"	36"	3.5"W x 36"H x 2"D	SW-TO-X3
T-Connection Inward Extension	3.5"	36"	3.5"W x 36"H x 2"D	SW-TI-X3

# SHIELD WALL™ PARTS LIST [CONT'D]

## HARDWARE AND CONNECTORS

## PART NUMBER

Shield Drop In Panel Connectors, 10/PK	SW-HWDC10
Shield Panel Clamp, 10pk.	SW-HWPC10
Shield Ceiling Clamp, 10pk.	SW-HWCG10
Shield Ceiling Clamp Slim, 10pk.	SW-HWCG10S
Hardware Floor Bracket, 10/pk	SW-HWFB10
Ceiling Bracket for Drywall, 10/pk	SW-HWCD10
Shield Panel Bracket, 10/pk (Original 4 finger design)	SW-HWPB10

## WALL SEALS & ADAPTERS

## PART NUMBER

Wall Seal Extension Kit - LH & RH Extends up to 3.5"	SW-WSA
Wall Seal Kit, Extended - For Drywall	SW-WSED
Wall Seal 3" Extended, Metal with Foam - L & R	SW-WSE3
Adapter - Connect SHIELD WALL™ Panels to Other System Panels	SW-ADP1

## OTHER ACCESSORIES

## PART NUMBER

Locking Door Lever	SW-HDWRD
Digital Keypad	SW-HDWRDP
Window Kit Standard 24" (ONLY FOR CLASSIC & CLEAR)	SW-WK
Window Kit Large 36" (ONLY FOR CLASSIC & CLEAR)	SW-WKL
Shield Transport Cart	SW-CART
Pressure Monitor Universal Hanger	SW-HWPMUK
Closed Cell Gasket, 8ft length	TAPE46

## EXHAUST PORTS

## COLLAR SIZE

## DIMENSIONS

## PART NUMBER

8" Exhaust Plate	8"	15"W x 15"T x 3"D	SW-EX08
10" Exhaust Plate	10"	15"W x 15"T x 3"D	SW-EX10
12" Exhaust Plate	12"	15"W x 15"T x 3"D	SW-EX12

## EXHAUST PORT KITS

## DIMENSIONS

## PART NUMBER

Exhaust Kit, 2 Frames with Security Plate and Plastic Knob	16.5"W x 16.5"T x 2"D	SW-EXK
Exhaust / Intake Plate with Diffuser and 2" Pleated Filter	20"W x 20"T x 3"D	SW-EXD

**ASK US ABOUT RENTAL OPTIONS**





# CONTAINMENT PRODUCTS

## for CDC & ICRA Guideline Compliance

### ICRA Compliance Packages

#### TEMPORARY, REUSABLE, ADAPTABLE MODULAR CONTAINMENT KIT



OPTIONAL TRANSPORT CART IS AVAILABLE TO PURCHASE

Our anteroom starter packages have all of the resources you need to secure construction and renovation projects in healthcare facilities. The SHIELD WALL™ by ABATEMENT TECHNOLOGIES® is a new modular temporary containment barrier system consisting of simple-to-connect panels and doors and is deployable in minutes. The system is lightweight, reusable and has a clean and professional appearance. You can quickly erect an 8'W x 2'D anteroom with these package components and then purchase additional panels, doors or accessories as and when you need them on a project by project basis. The height of every panel and door is adjustable from 7' to 10'3". Special order clear panels and mixed combinations of clear and translucent panels are available, inquire for more details.

Four Anteroom Kits are available and all four kits include: a 4' panel, a 2' panel, a 2' panel with an exhaust port and all installation hardware.

#### SLIDING DOOR

The AR3 anteroom kits offer a 42" sliding door set in a 48" panel, and the option to include two fixed or two flexible corners.

SW-AR3 - two 90° fixed corners

SW-AR3H - two flexible hinged corners provide a 255° range of sweep

#### UNIVERSAL SWING DOOR

The AR2 anteroom kits offer a 4' universal swing door (in or out) that may be hung left or right and a choice of corners, either two fixed or two flexible.

SW-AR2 - two 90° fixed corners

SW-AR2H - two flexible hinged corners provide a 255° range of sweep

#### AIRE GUARDIAN® TRANSITION MODULE

- Enclosure flange fits any 46" - 48" wide, 80" tall doorway
- Large zippered doors at either end are wide enough for a gurney
- Large view windows
- Designed for use with a HEPA-CARE® in-room HEPA filtration unit
- Tough military tent fabric meets relevant fire/life safety standards



PART NO: AG3100TMK

#### DOOR GUARD REUSABLE BARRIER

- Designed to isolate construction and renovation activities in compliance with CSA, CDC and ICRA Guidelines
- Easily mounts around the perimeter of standard 80" tall x 44" - 49" wide doorways
- 2 Door Guards can be taped together to fit over double doors up to 108" wide
- Durable Fire rated 10 mil fabric conforms to: CDC ICRA Barrier Guidelines, Federal Std. No. 191A, Test Method 5903, MVSS 320, CA State Fire Marshall



PART NO: AG-DG100

#### IC750M0BVC



- ICRA Package includes: 1 ea AG3000MCCK, 12 ea F621, 1 ea PRED750, 6 ea H502, 1 ea V800WD, 1 ea H2350-10, 1 ea AG-CADDY

\*Note ladder not included in either package

#### IC750M0BKC



- ICRA Package includes: 1 ea AG3000MCCK, 1 ea PRED750, 1 ea AG-CADDY, 12 ea F621, 6 ea H502, 1 ea H2350-10



# CONTAINMENT PRODUCTS

for CDC & ICRA Guideline Compliance



AG8000PAS-RPM WITH TOP EXTENSION  
AG8000-EXT24 (NOT INCLUDED)

## AIRE GUARDIAN® 8000

Mobile Containment Cart

- Tough hard sided cart effectively contains dust particles during ceiling access work
- Height adjusts with a power drill or hand crank for single-handed header extension and retraction to ceiling heights just over 10'
- Collapsed 77.5" fully extended 122", fully extended with extension 146"
- 16', 3-section fiberglass extension ladder included
- Recessed floor pockets and built-in ladder bracket accept and secure ladder in place
- Cart features easy to clean anodized aluminum frame with clear polycarbonate walls and has a 900 lb load rating
- Cart exhaust port is designed specifically for the Abatement Technologies [PAS750](#) model air scrubber (optional) and provides HEPA efficient negative air containment for ICRA compliance
- Optional equipment includes: PAS750 portable air scrubber; AG-CADDY cart and RPM-RT1 differential room pressure monitor
- [AG8000-PAS](#) (Includes PAS750 Portable Air Scrubber)
- [AG8000PAS-RPM](#) (Includes PAS750 Portable Air Scrubber and RPM-RT1 pressure monitor)
- Maximum working ceiling height 10'2" (with AG8000-EXT24 12'2") and increases the surface workspace within the confines of the top by an additional 5' sq.ft
- Wider and Taller coverage with the optional [AG8000 Extension](#)



OUR UNIQUE RIGID UPPER STRUCTURE SUPPORTS THE LADDER AT THE CEILING HEIGHT PROVIDING UNMATCHED REACH AND LADDER SAFETY WHILE WORKING ABOVE THE DROP CEILING.



# CONTAINMENT PRODUCTS

## for CDC & ICRA Guideline Compliance

### AIRE GUARDIAN® 5000

Mobile Containment Cart



\*PATENT PENDING

### AIRE GUARDIAN® 3000

Mobile Containment Cart



#### FEATURES & BENEFITS

- **Kit - IC750MOBAG5K:** Cart, Portable Air Scrubber, Caddy Cart, Filters, 2 Clamps, and 2' of 10" dia. Flex Ducting
- Collapsible to 20" in height
- Fits in standard truck bed
- Easy on-site two-person assembly
- Height adjustable from 80" to 124"
- Fully extended footprint dimensions: 32"W x 66.5"L x 124"H
- Ideal for meeting ICRA compliance while performing projects requiring ceiling access
- Perfect for wall & ceiling access projects (side access adapter required)
- Top closes and seals for full particle containment
- Easy-to-clean anodized aluminum frame & walls with clear polycarbonate windows
- Clear pouch for work orders and documents
- Pass-through opening with a removable cover in the top enclosure
- Portable air scrubber port for negative air operation
- Add differential pressure monitor RPM-RT1 (purchased separately)
- Accommodates up to 900 lbs of evenly distributed weight
- Maximum usable ceiling height: 10' (3m)
- Accepts any 8-foot A-Frame step ladder (not included)

#### FEATURES & BENEFITS

- **Kit - IC750MOBVC:** Cart, Portable Air Scrubber, HEPA Vacuum & Filters
- One person assembly and deployment
- Precise height adjustment up to 10'
- Large, clear plastic windows on all 4 sides, for visibility
- Large zippered entry/exit doors on 3 sides
- Zippered top, for full access above drop-ceilings
- Portable air scrubber and HEPA vacuum ports
- CA Fire Marshall, CDC, AIA, NFPA, and CSA compliant
- Perfect for wall & ceiling access projects
- Footprint Dimensions: 30" x 60"
- Maximum Usable Ceiling Height: 10'
- Collapsed Height on Cart: 72.5"
- Accommodates up to 900 lbs of evenly distributed weight
- Pass-through opening with a removable cover
- Clear pouch for work orders and documents
- Double thickness floor for added strength & durability
- Zippered openings on 2 sides for wall cavity access





# ENVIRONMENTAL MONITORS

## Pressure Monitors and Particle Counters



PART NO: RPM-RT1 OR RPM-RT2

### WALL-MOUNTED DIFFERENTIAL PRESSURE MONITOR

- [RPM-RT1](#) monitors one room relative to a reference area
- [RPM-RT2](#) monitors two rooms relative to a reference area
- Optional remote sensor measures temperature and relative humidity (PN: [RPM-RTSENSOR](#))
- Colour coded screen background designates alarm status
- Audio alarm delay and timed shut off features
- Differential pressure measurement in the ranges of -0.10inWC (-25 Pa) to +0.10inWC (+25 Pa)
- View readings history onscreen or upload to a PC via a USB stick
- BACNET and N2 network capability
- Dual level password protection for operators and administrators

RPM-RT1K Kit includes: 1 ea pressure monitor, 1 ea 25' of clear tubing, 1 ea temperature/rh sensor and 1 ea 25' Ethernet cable

RPM-RT2K Kit includes: 1 ea pressure monitor, 2 ea 25' of clear tubing, 2 ea temperature/rh sensors and 2 ea 25' Ethernet cables

RPM-RT1T - Kit includes: 1 ea Pressure Monitor and 1 ea 25' of Clear Tubing 1/8" ID x 1/4" OD

RPM-RT2T - Kit includes: 1 ea Pressure Monitor and 1 ea 25' of Clear Tubing 1/8" ID x 1/4" OD



PART NO: PPM3-S

PART NO: SW-HWPMUK

### PORTABLE DIFFERENTIAL PRESSURE MONITOR

- Colour touch screen display
- Built-in visual and audible alarm system with audio alarm override
- Differential pressure measurement in the ranges of -0.10inWC (-25 Pa) to +0.10inWC (+25 Pa)
- Reading accuracy of  $\pm$  3%
- Operating temperature range of 41°F (5°C) to 131°F (55°C)
- Optional wall mounting bracket ([RPM-HANG](#)) for security / theft protection
- Universal Mounting Bracket for SHIELD WALL™ (SW-HWPMUK)



PART NO: VPC300

### VIDEO PARTICLE COUNTER WITH BUILT-IN CAMERA

- Simultaneously measure and display 6 channels of particle sizes (down to 0.3  $\mu$ m), Air Temperature, Humidity, Dew Point and Wet Bulb
- 2.8" TFT Color LCD display
- Built-in 320x240-pixel camera takes videos (3GP) and photo images (JPEG) and records them in internal 74MB memory
- Store 5000 records (date, time, counts, humidity, temperature, sample volumes, and location label) and 20 minutes of video
- Selectable sample time, count data, and programmable delay
- Max, Min, DIF, AVG record, Date/time setup controls
- Language selection: English, French, German, Spanish
- Meter is NIST calibrated
- Tripod mount for continuous recording
- Mini-USB port connection
- microSD card slot in battery compartment (memory card not included; max size 8GB)
- Complete with NIST-traceable calibration certificate, Universal AC Adapter/Charger with multiple plugs, USB cable, PC software, tripod, filter, 7.4V NiMH battery and hard case



# PORTABLE HEPA VACUUMS & COMMERCIAL DRYING EQUIPMENT

## HEPA VACUUMS

### CANISTER WET / DRY HEPA VAC



PART NO: V8000WD

- Exceptional performance: 135 CFM and 92" static lift
- Portable, compact and lightweight design: 22 lbs
- Durable polyethylene cabinet
- 1.6 HP motor
- True 99.97%+ efficiency HEPA filter
- 8 GAL tank capacity
- 22' power cord
- Filters/Bags:
  - [V8040-5](#) Fleece Filter Bag, 5/pk
  - [V8042](#) - HEPA Filter, DRY USE ONLY, 1/ea
  - [V8042-W](#) - HEPA Filter, Wet/Dry Use, 1/ea

### CANISTER STYLE DRY HEPA VAC



PART NO: G0930

- Exceptional performance: 74 CFM and 92" static lift
- Portable, compact and lightweight design: 16.5 lbs
- Sturdy chrome-plated steel container
- True 99.97%+ efficiency HEPA filter
- 4 GAL tank capacity
- 32' power cord
- Filters/Bags:
  - [V93040](#) - Replacement Bags, 10/pk
  - [V930-10](#) - HEPA Filter, 1/ea

### BACKPACK HEPA VAC



PART NO: G010

- Lightweight, ergonomic design to reduce fatigue
- Powerful: 99 CFM airflow and 96" static lift
- Upstream HEPA filter rated 99.99% @ 0.3 microns
- 50' power cord
- Filters/Bags:
  - V1471097500 - Dust Bag, 5/pk
  - V1471104500 - HEPA Filter, 1/ea

## AIR MOVERS

### RAM LOW PROFILE AIR MOVERS



PART NO: RAM1000LP

- 2 Speed settings: High (1000CFM) and Low (700 CFM)
- Can be placed in 4 drying positions
- Onboard GFCI protects against electrical shock in damp or wet applications
- Designed to stack for easy storage
- Easy-clean, removable front grill and polyethylene housing
- Conforms to UL 507 and CSA 22.2 No. 113 standards
- Hour meter
- Resettable circuit breaker
- Weighs 20.3 lbs
- Less than 2 amps on high

### RAM CENTRIFUGAL AIR MOVERS



PART NO: RAM1000DBL

- High velocity: 2,850 FPM @ high speed
- Air volume: 1,125 CFM @ high speed
- 2.2 amps (low speed) / 2.8 amps (high speed)
- Perfect weight balance: Weighs only 25 lbs
- 3 operating positions: Horizontal, 45 degrees and vertical

## DEHUMIDIFIERS

### AQUATRAP® LGR DEHUMIDIFIER



PART NO: AT150C

- Get instant, real time readings with built-in WiFi and the AT Dry App
- Units may be stacked up to two high for space saving storage
- Water removal @ AHAM (80° F/60% RH) 85 Pints / 40L per day
- Folding handle is easily moved out of the way
- "No tools" filter changes

### AQUATRAP® LGR DEHUMIDIFIER



PART NO: AT200C

- Get instant, real time readings with built-in WiFi and the AT Dry App
- Stackable for space saving storage
- Water removal @ AHAM (80° F/60% RH) 110 Pints / 52L per day
- Folding handle is easily moved out of the way
- "No tools" filter changes



# ICRA PACKAGES FOR MOBILE CONTAINMENT

## From years of working with healthcare contractors...

### Time and cost-saving ICRA compliance packages.

These convenient kits include an air scrubber, a wet/dry HEPA vacuum, a pressure monitor, and various accessories. ICRA kits provide facilities with a prepackaged assortment of the items most commonly required for isolation of airborne construction contaminants. ICRA kits provide 6 or more ACH in containment areas as large as 5,000 to 20,000 cubic feet.

#### IC21000PK\*/IC21000FK\*\*



#### IC9000PK\*/IC9000FK\*\*



#### IC10000PK\*/IC10000FK\*\*



#### IC21000PK\*/IC21000FK\*\*

#### IC9000PK\*/IC9000FK\*\*

#### IC10000PK\*/IC10000FK\*\*

Maximum Containment Area in Cubic Ft	21,000	9,000	9,000
Portable Air Scrubber	PAS2400	PAS1200	PRED1200
Wet/Dry Vac	V8000WD	V8000WD	V8000WD
Room Pressure Monitor Kit (Portable or Fixed)	Room Pressure Monitor	Room Pressure Monitor	Room Pressure Monitor
Pre-filters (1 cs)	F1821	F621	F621
Secondary Filters (1 cs)	H1902	H502	H502
Flex Duct and Locking Attachment Clamp (1 ea)	H2030-12-10 & H2350-12	H2030-12-10 & H2350-12	H2030-12-10 & H2350-12
6 Mil ICRA Awareness Barrier (1 ea)	DS-8500FR	DS-8500FR	DS-8500FR
Zipwall Adhesive Zippers (2 ea)	HCHDAZ-12	HCHDAZ-12	HCHDAZ-12
Grill Mask (1 cs) and Dispenser (1 ea)	K1-GM13 & K1-GM-DS-13	K1-GM13 & K1-GM-DS-13	K1-GM13 & K1-GM-DS-13

\*PK packages contain the [PPM3-S](#) portable differential pressure monitor

\*\*FK packages contain the [RPM-RT1](#) room pressure monitor





## CONSUMABLES AND PPE

In addition to the trusted products we make and sell, we have partnered with some of Canada's best brands to provide you with a more complete line of products to try and cover everything you do on site. Making Abatement Technologies® your single destination for quality equipment and supplies.

### PERSONAL PROTECTIVE EQUIPMENT



**HAND PROTECTION:**  
Nitrile, Rubber, Cloth and Cut Resistant Work Gloves



**HEAD PROTECTION:**  
Certified Hard Hats and Accessories



**RESPIRATORS AND FILTERS:**  
Full Facepiece, Half Facepiece, Particulate and Combo Filters



**DISPOSABLE DUST MASKS**



**EYE WEAR:**  
Safety Glasses and Chemical Splash Goggles



**FALL PROTECTION:**  
Harnesses, Lanyards, Self-Retracting Lifelines & Anchors



**FIRST AID PRODUCTS:**  
Eyewash Stations, Complete First Aid Kits




**DISPOSABLE PROTECTIVE CLOTHING:**  
Breathable, Non-Breathable Coveralls, Boot and Shoe Covers

### TOOLS AND ACCESSORIES



**GRILL MASK AND DISPENSERS**



**STICKY FLOOR MATS**



**AIR SCRUBBER FILTERS**



**TAPES**



**DUCTING AND CLAMPS**

### CONTAINMENT PRODUCTS



**POLY SHEETING, CLEAR, RIP-PROOF, FIRE RETARDANT**



**RE-U-ZIP KIT**

Self-closing magnetic barrier entryway. Kit includes 1 magnetic closer strip, 4 mounting strips and a carry case.



**FLOOR PROTECTION**

Hard Floor, Carpet and Reusable Floor Runners



**ZIPWALL PRODUCTS:**

Disposable Zippers, Spring Loaded Poles, Door Kits



**POLY HANGERS AND GRABBERS**



**DISPOSABLE BAGS:**

Asbestos and Garbage. Available in Multiple Sizes and Thicknesses

### CHEMICAL PRODUCTS



**DISINFECTANTS**



**SPRAY GLUES**



For more than 38 years  
companies around the world  
have relied on Abatement  
Technologies for HEPA filtration  
systems and other indoor air quality  
products with industry-leading quality,  
performance and reliability.



## BRANCH OFFICES

### VANCOUVER

F102-19720-94A Avenue,  
Langley BC V1M 3B7

778-372-2611

### CALGARY

F-7004 5th St. SE  
Calgary, AB T2H 2G3

403-351-2223

### MONTREAL

1950 Bernard Lefebvre  
Laval, QC H7C 0A5

514-375-0606

### EDMONTON

16403 - 117 Ave.  
NW Edmonton, AB T5M 3V3

780-665-5165

### HAMILTON

428 Millen Rd. Unit 10  
Stoney Creek, ON L8E 3N9

905-664-6075

### DARTMOUTH

121 Ilsley Ave Unit 12  
Dartmouth, NS B3B 1J1

902-334-0900

### TORONTO

144 Sharer Rd.  
Vaughan, ON L4L 8P4

905-266-1322

### OTTAWA

51 Capital Drive  
Ottawa, ON K2G 0E7

613-749-9667

### ST. JOHN'S

5 Maverick Place  
Paradise, NL A1L 1Y8

709-800-9020

## MAIN OFFICES

### ABATEMENT TECHNOLOGIES USA

605 Satellite Blvd. Suite 300  
Suwanee, GA 30024  
US 800-634-9091  
Intl. +01-678-889-4200  
iaqinfo@abatement.com

### ABATEMENT TECHNOLOGIES CA

1481 Harber Court  
Fort Erie, ON L2A 0G3  
CAN. 800-827-6443  
Intl. +01-905-871-4720  
iaqinfo@abatement.ca

### MISSISSAUGA

1800 Courtneypark Drive E., #1  
Mississauga, ON L5T 1W1  
905-564-7666

### MONCTON

1070 St. George Blvd Unit 100  
Moncton NB E1E 4K7  
506-406-5999

1.800.827.6443

ABATEMENT.CA

IAQINFO@ABATEMENT.CA

## ABATEMENT TECHNOLOGIES: LEADERS IN CLEAN AIR

## HEALTHCARE CONSTRUCTION & FACILITY MAINTENANCE

### Compliance with Standards and Guidelines

For the past 20 years, Abatement Technologies has provided health care facilities with the technology they need to comply with current infection-control standards and practices in an effective and economical manner. These include guidelines developed by the Centers for Disease Control and Prevention (CDC), Health Canada, the Canadian Standards Association (CSA), the American Institute of Architects (AIA), Department of Homeland Security HRSA Critical Benchmark 2.2, and Joint Commission requirements.

© 2023, Abatement Technologies, Limited. All Rights Reserved. No reproduction of any portion of this advertisement is permitted without the express written permission of Abatement Technologies, Limited. All illustrations and specifications contained in this advertisement are based on the latest product information available at the time of printing. Abatement Technologies reserves the right to (1) make changes at any time, without notice, to product designs, specifications, materials and colours, (2) to introduce new models to the marketplace and, (3) discontinue products as it sees fit. HC CONSTRUCTION CATALOGUE